


SHAFT-EXTRACTING & LIFTING TROLLEY


UK

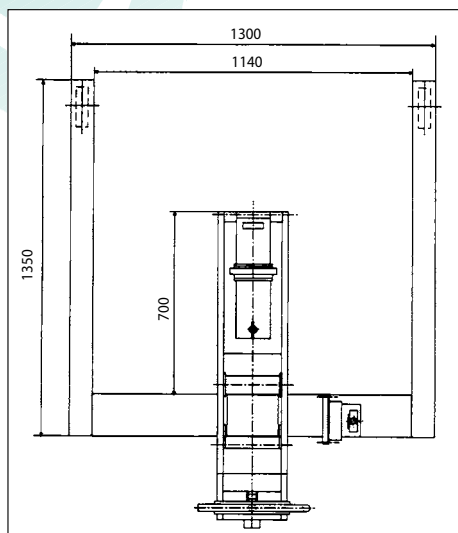

TECHNICAL CHARACTERISTICS

- ☐ Built according to the technical standards in force
- ☐ Upward movement by means of manual hydraulic pump; descent by means of self-locking manual command.
- ☐ Manually regulated clamping device
- ☐ Manual movement on vulkulan wheels
- ☐ Max capacity load: 150 kg
- ☐ Weight of the trolley: ~ 250 kg

The dimensions of the trolley can be adapted to the customer's requirements. Please fill in the technical card below in order to check if the standard model is used appropriately or if the model has to be modified.

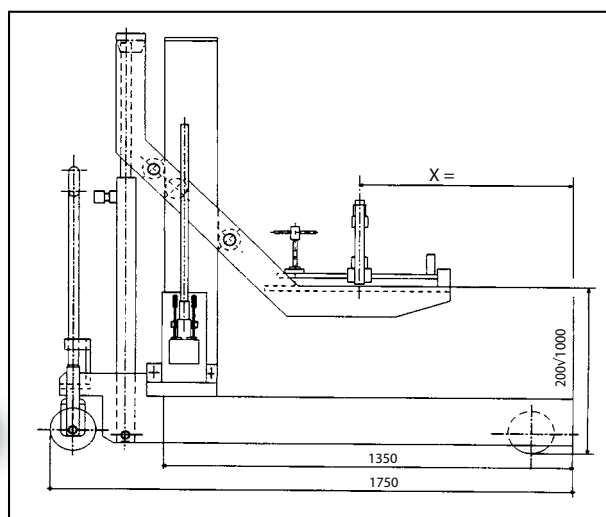

Firm:

Contact:

Min. and max. reel diam.:

Min and max clamping height:

Shaft length:


Shaft weight:

Shaft blocking:

☐ Manual☐ Hydraulic

Sketch of the shaft ends:

ELECTRONIC SHAFT-EXTRACTING LIFTING TROLLEY

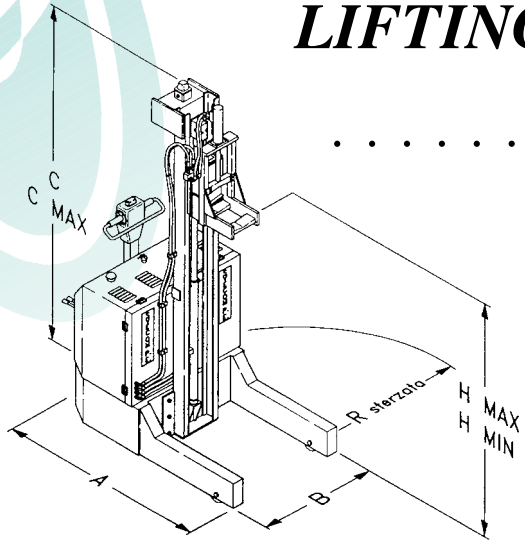

The SELF-PROPELLED TROLLEY has been designed for the extraction and handling of expanding shafts and chucks from a reel of wound material, such as paper of various basis weights, and for the re-insertion of the same in paper core or cores which have been suitably prepared by the operator. The unit has been manufactured according to the strictest accident-prevention standards and maintains optimum efficiency even in extended use.

It is composed of a base frame mounted on wheels, an electro-hydraulic pump, and a piston which drives a vertical carriage, which in turn supports a hydraulically-powered vice, in which the shaft is clamped. The vehicle is electrically powered, via a high-capacity battery.

A	mm	:	1280
B	mm	:	890
C	mm	:	2000
H max	mm	:	1750
H min	mm	:	170
R	mm	:	1060

Model	COYOTE1		
Capacity	Kg.	:	800
Carriage weight	Kg.	:	± 450
Traction battery	Aph	:	195
Autonomy	h.	:	8/9
Battery charger	supplied on request		
Acoustic emission	dB	:	db < 67



FUNCTIONING

All lifting and clamping is achieved electro-hydraulically. Driving motion is through electric motor.



WORK POSITION

The operator's work position is behind the machine in the direction of movement.



LIGHTING AND HEALTH CONDITIONS AT THE WORK POSITION

In line with the provisions for light in the work environment, the place where the machine is installed must not have shadowed areas, bright lights or dangerous stroboscopic effects due to the surrounding machines.

